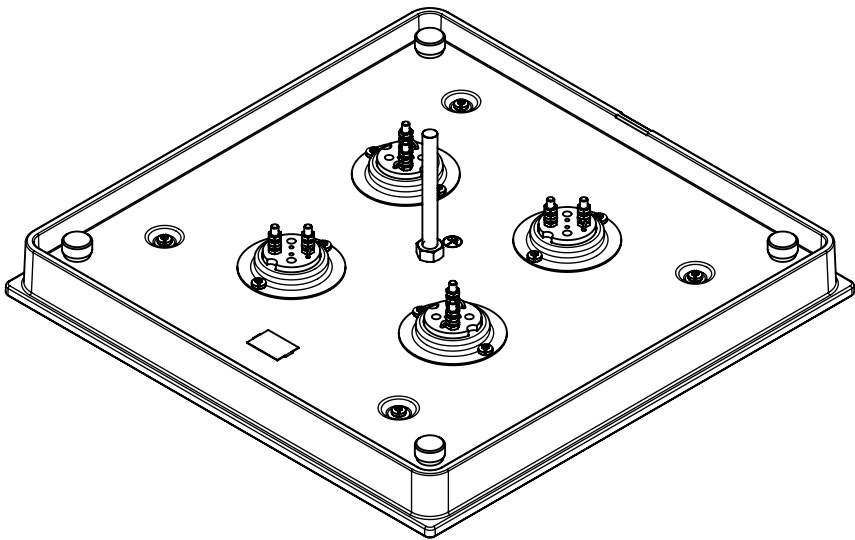
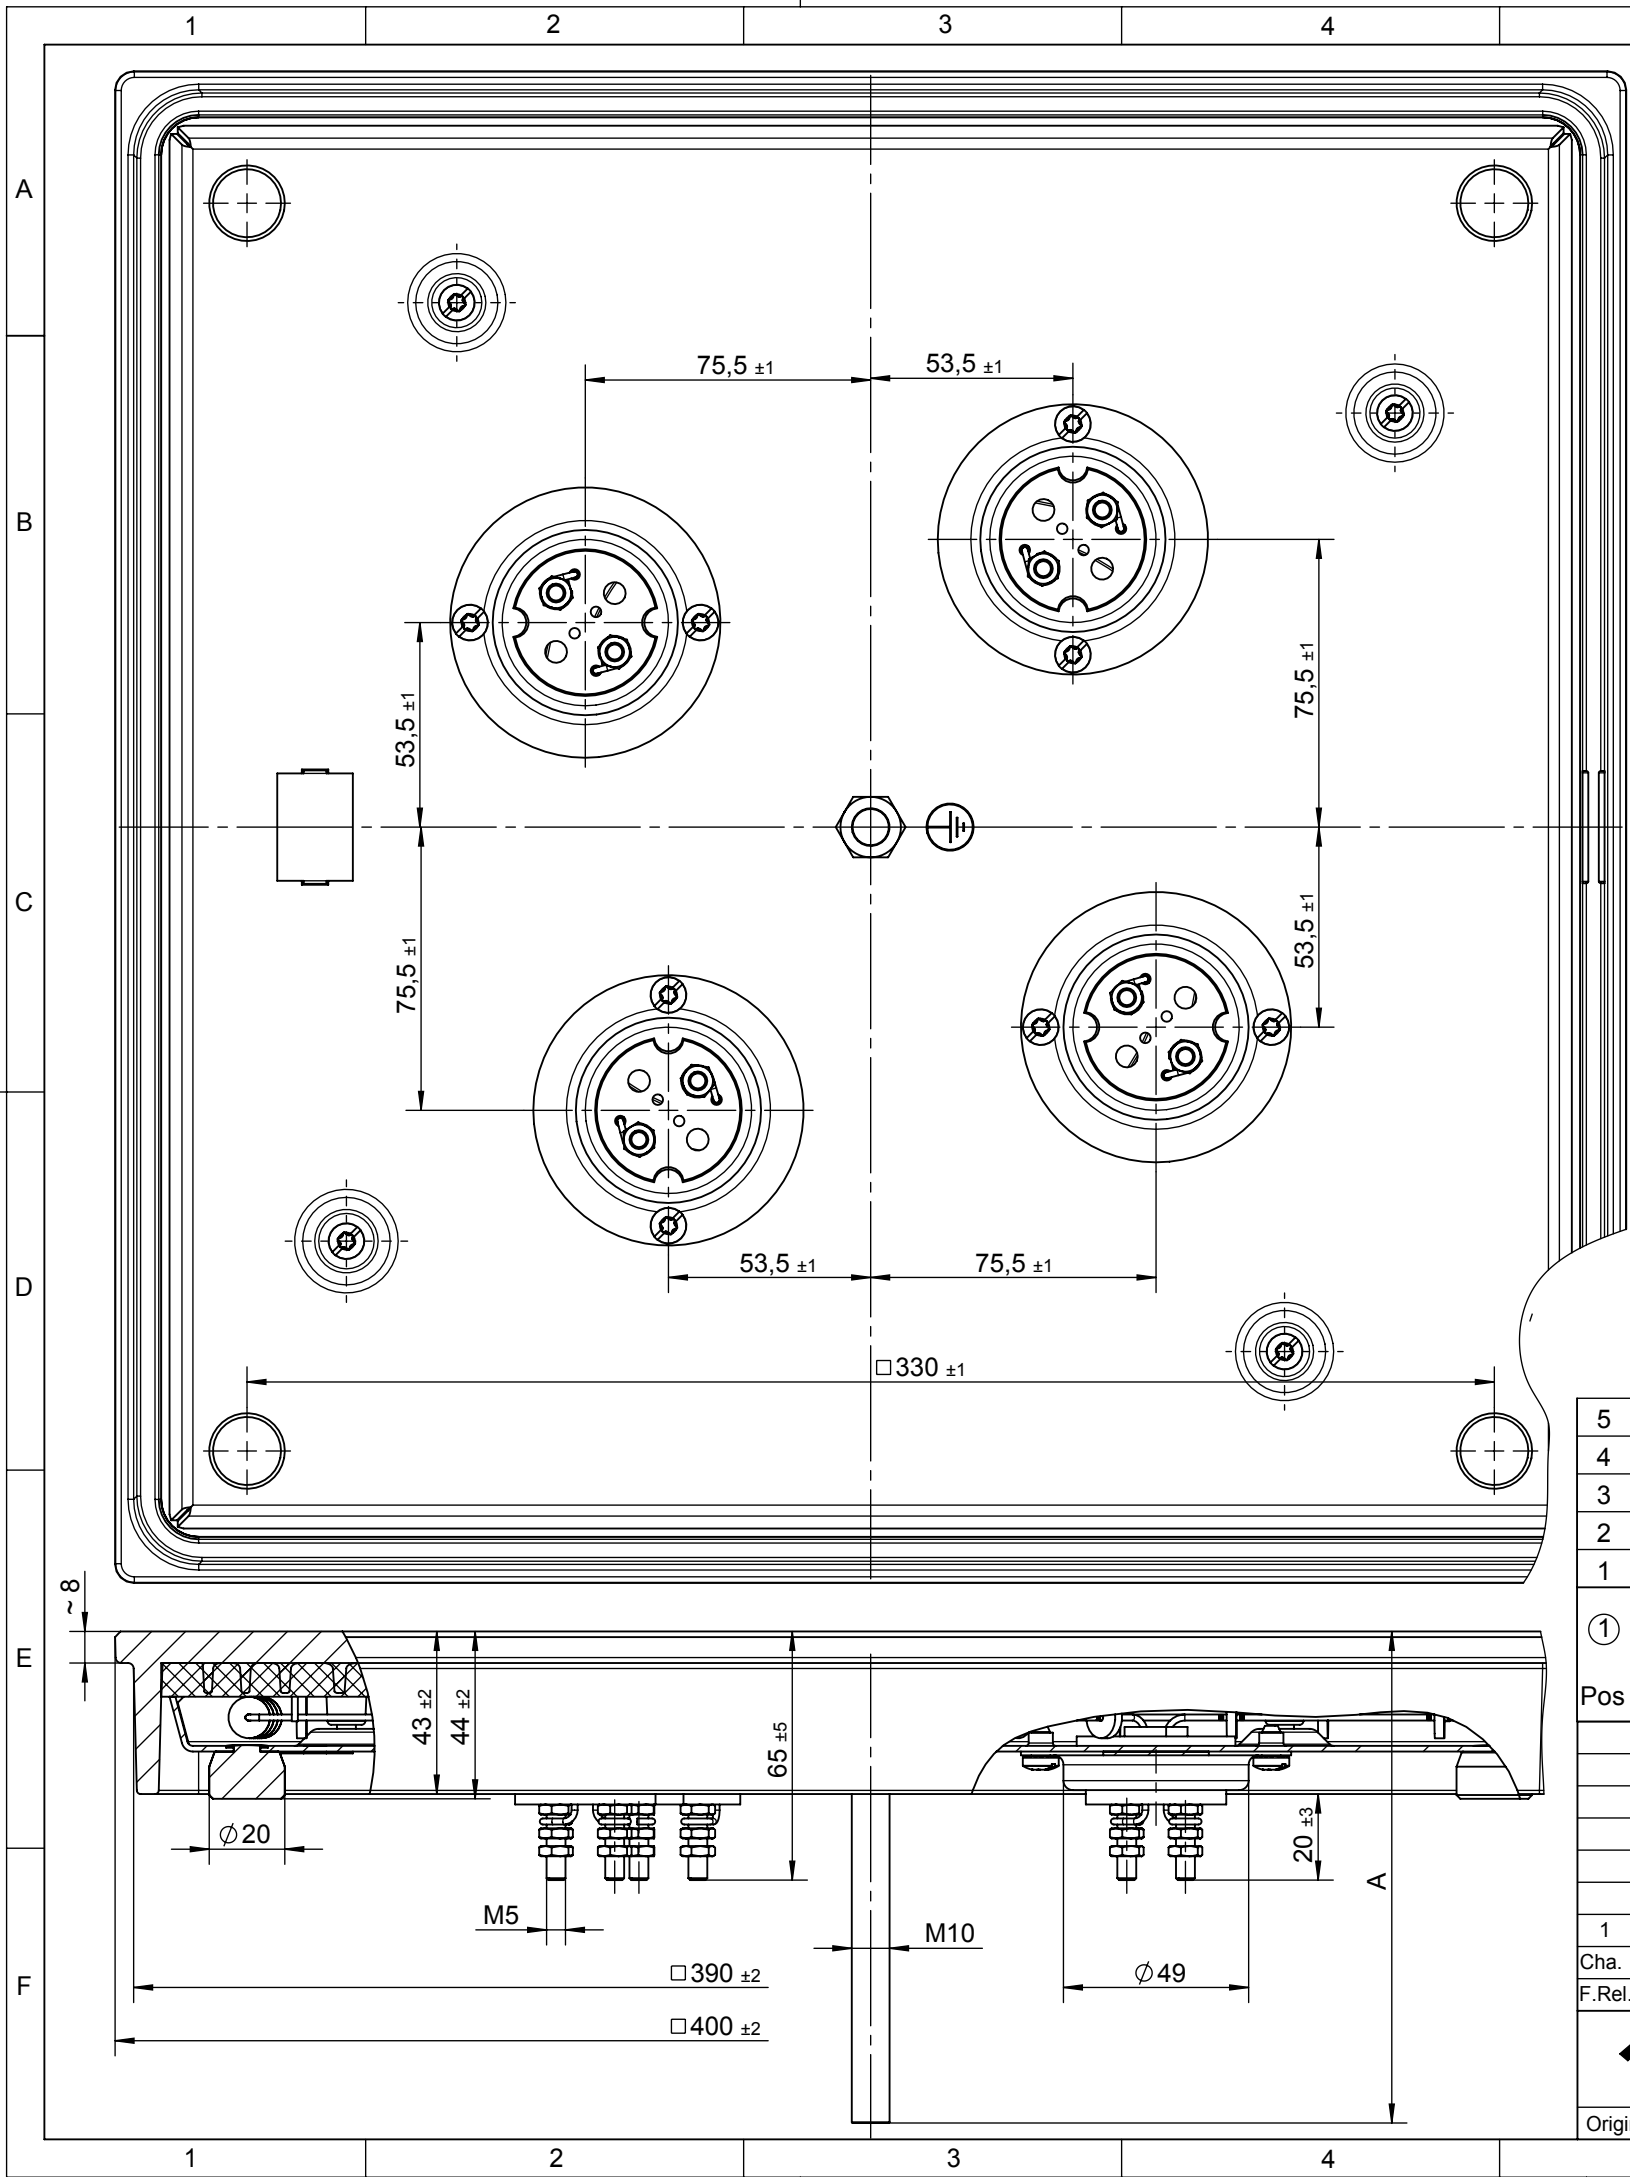



voltage marking
230 V without
240 V blue
400 V red
other green

Centre bold M10x120 and
hexagonal nut loosely attached.

Earth connection over centre
bold.

The sealed hotplate is fixed by
4 supporting spider on the
cover plate support.

wiring diagram

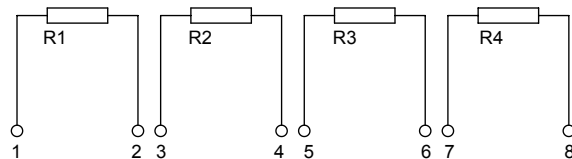

5	11.44870.007	5000	440	1250	1250	1250	1250		X		130±5		
4	11.44870.004	6500	400	1625	1625	1625	1625		X		130±5		
3	11.44870.003	5000	240	1250	1250	1250	1250		X		130±5		
2	11.44870.002	5000	230	1250	1250	1250	1250		X		130±5		
1	11.44870.001	5000	400	1250	1250	1250	1250		X		130±5		
①		W	V	R1	R2	R3	R4				"A" in mm		
Pos	Type	Wattage	Voltage	Rated conductor					Appro.				
			This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.				Blank No.	EN Mat.No.		Scale Unit mm			
							Material			Scale 1:2			
							Surface Texture ISO 1302						
							General Tolerances						
							CAD	Date	Name		Designation		
1	A01597	2017-11-22	Creat.	2017-10-17	MAKUCJ		EGO Com. Hotplate 400x400						
Cha.	Information No.	Date	Proc.	2017-10-18	MAKUCJ								
F.Rel.	A01400	2012-08-13	Rel.	2017-11-21	KOVACICB								
							Drawing No.	Sh.No.	Ver.	Stat.	Sheets	Doc.	Ex.Doc.
							11.44870.XXX	101	01	F			
Origin			Repl.for 11.44870. Div.			Repl.by			Ref.				