
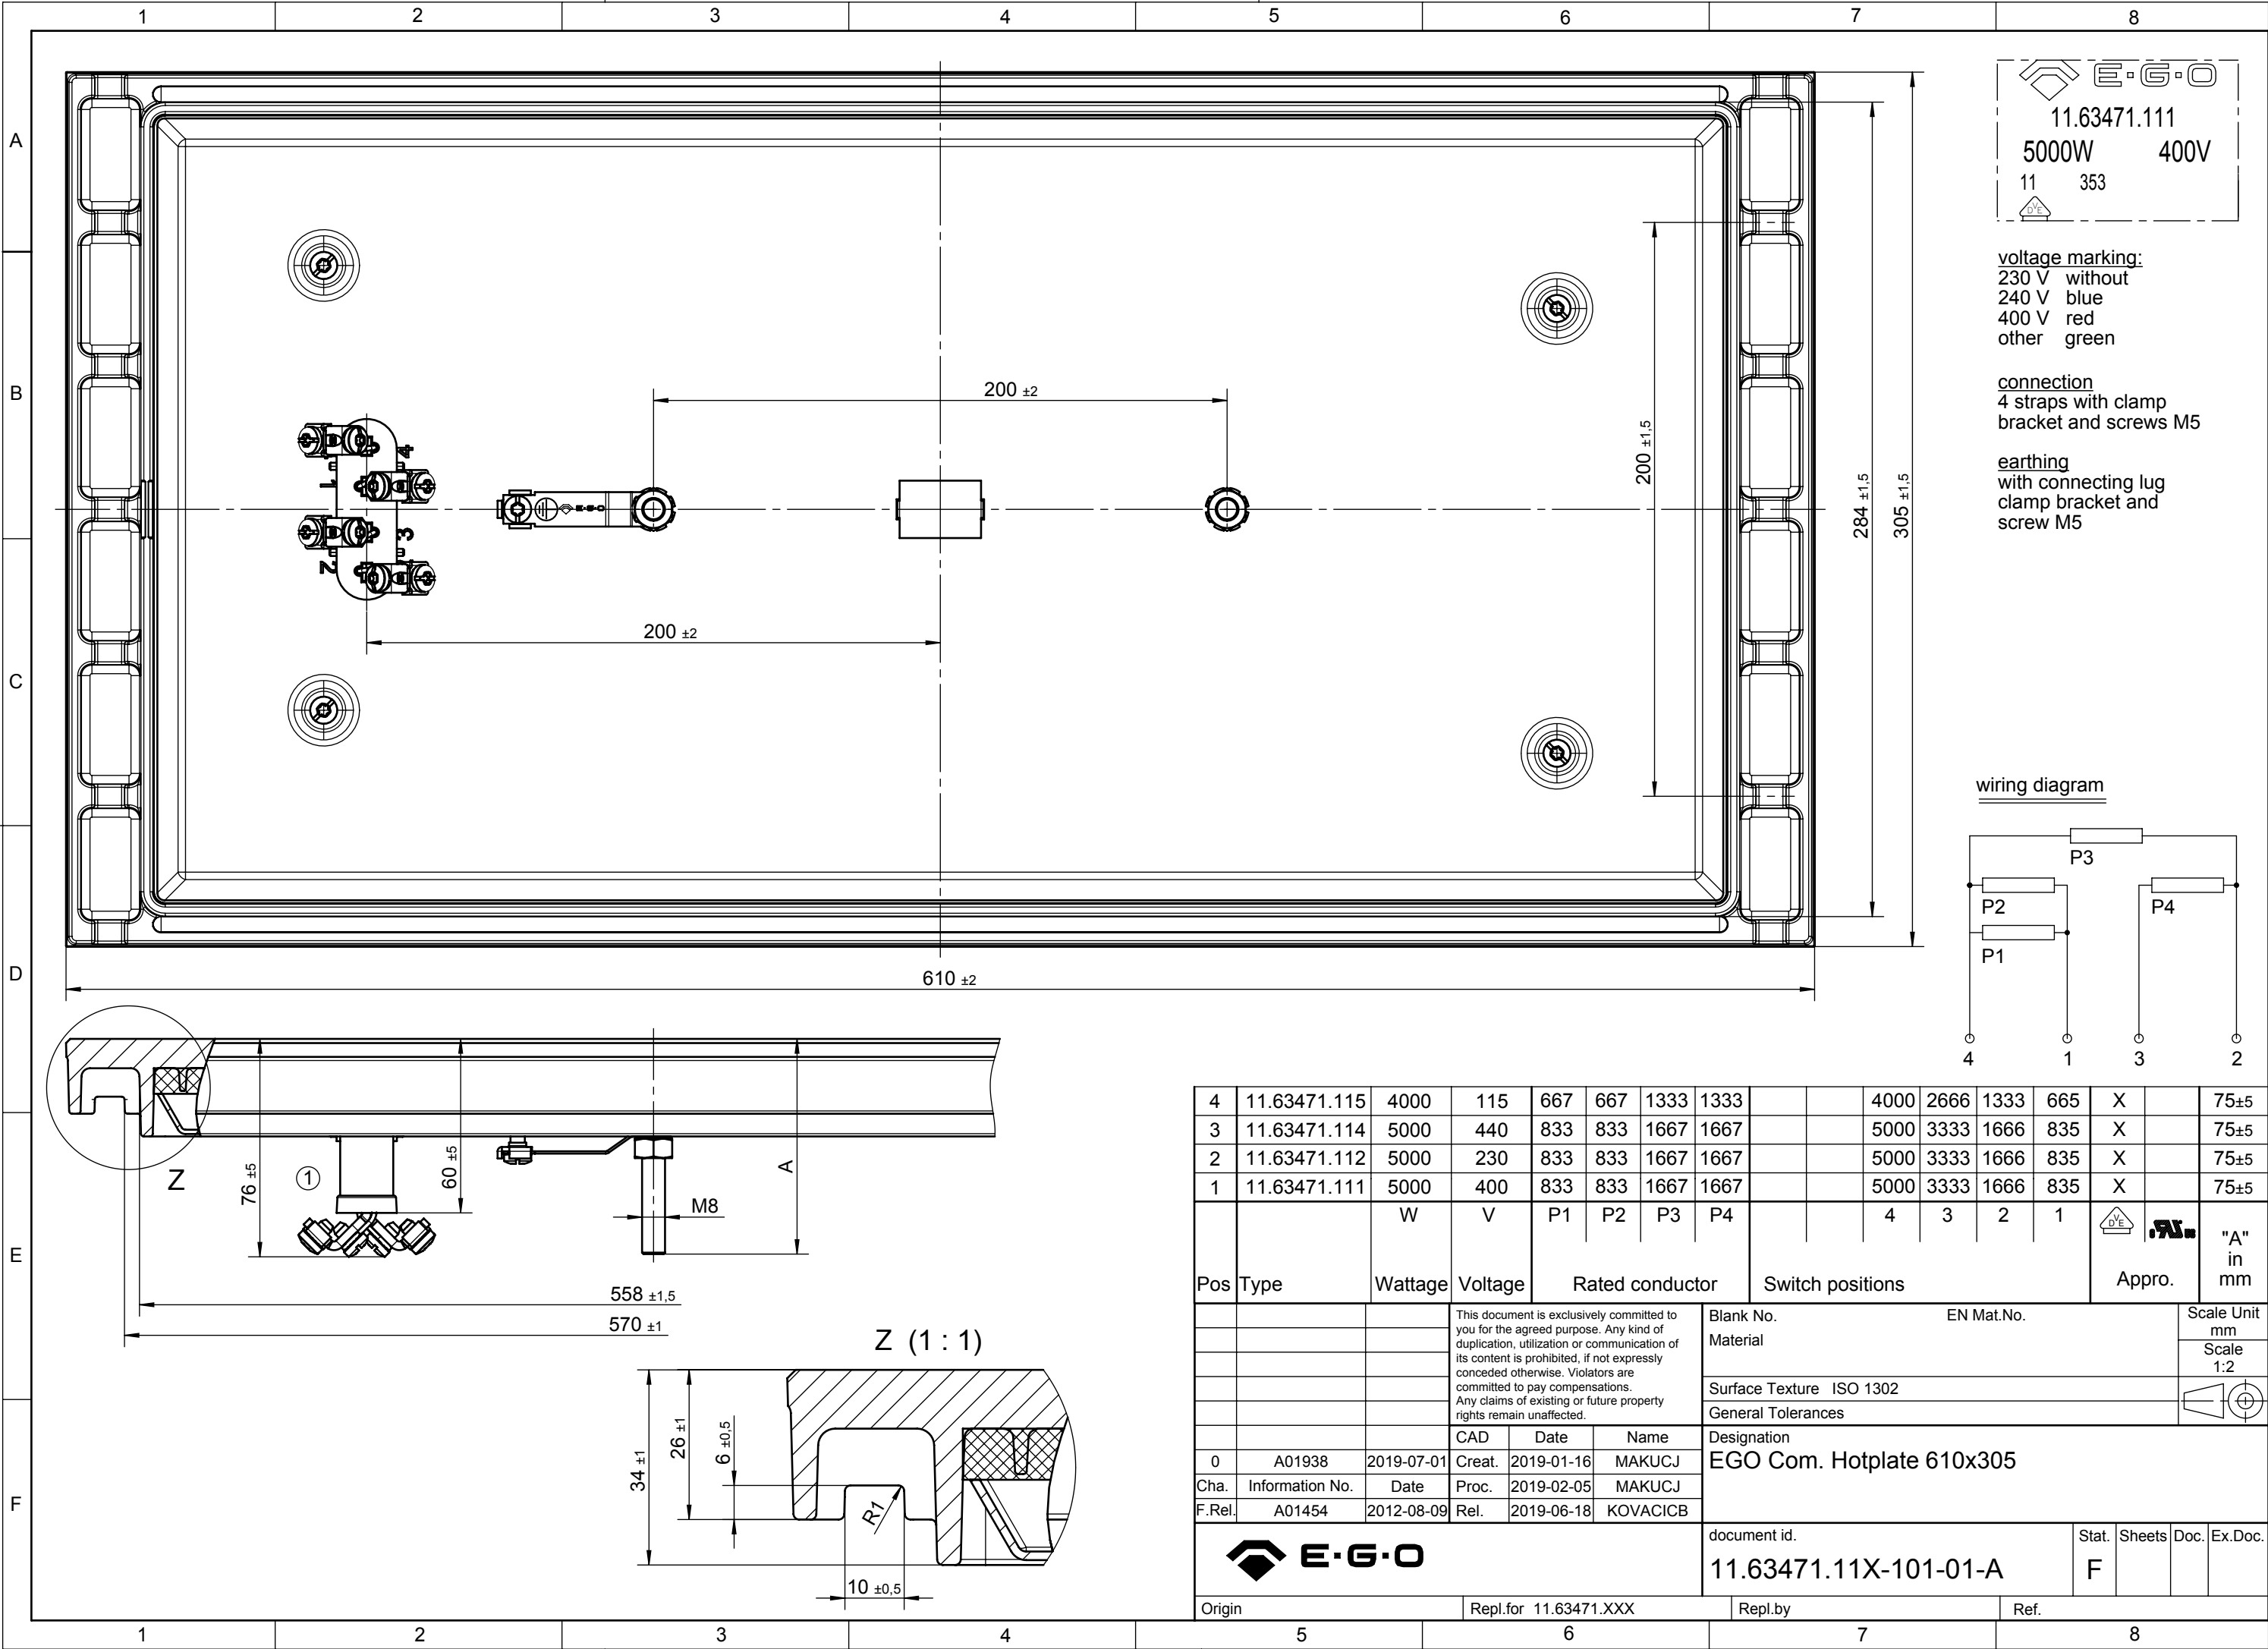


voltage marking:
230 V without
240 V blue
400 V red
other green

connection
4 straps with clamp
bracket and screws M5

earthing
with connecting lug
clamp bracket and
screw M5

wiring diagram

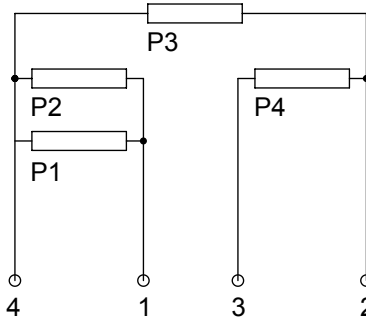

4	11.63471.115	4000	115	667	667	1333	1333			4000	2666	1333	665	X		75±5	
3	11.63471.114	5000	440	833	833	1667	1667			5000	3333	1666	835	X		75±5	
2	11.63471.112	5000	230	833	833	1667	1667			5000	3333	1666	835	X		75±5	
1	11.63471.111	5000	400	833	833	1667	1667			5000	3333	1666	835	X		75±5	
Pos	Type	Wattage	Voltage	Rated conductor				Switch positions				Appro.		"A" in mm			
				This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.				Blank No.				EN Mat.No.				Scale Unit mm	
								Material								Scale 1:2	
								Surface Texture				ISO 1302					
								General Tolerances									
								CAD				Date				Name	
0	A01938	2019-07-01	Creat.	2019-01-16		MAKUCJ		Designation									
Cha.	Information No.	Date	Proc.	2019-02-05		MAKUCJ		EGO Com. Hotplate 610x305									
F.Rel.	A01454	2012-08-09	Rel.	2019-06-18		KOVACICB											
								document id.						Stat.	Sheets	Doc.	Ex.Doc.
								11.63471.11X-101-01-A						F			
Origin			Repl.for 11.63471.XXX				Repl.by				Ref.						