

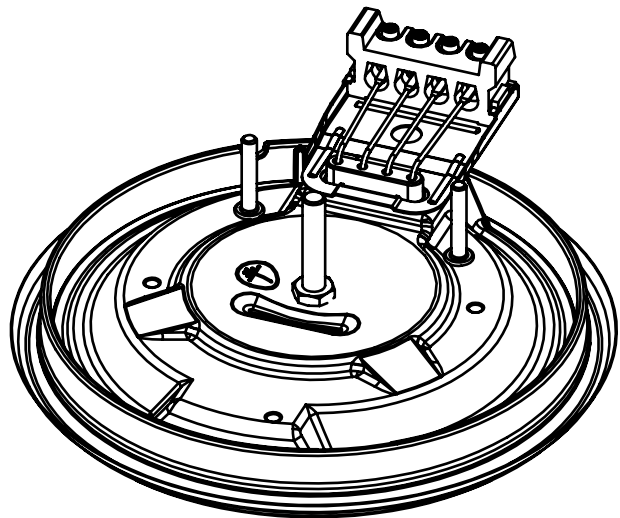
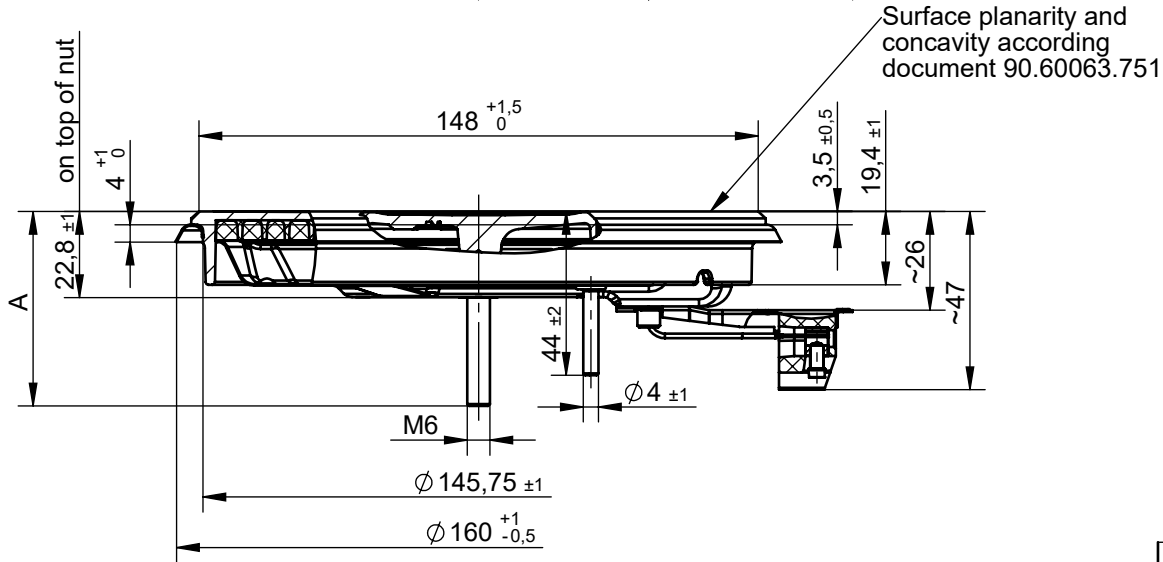
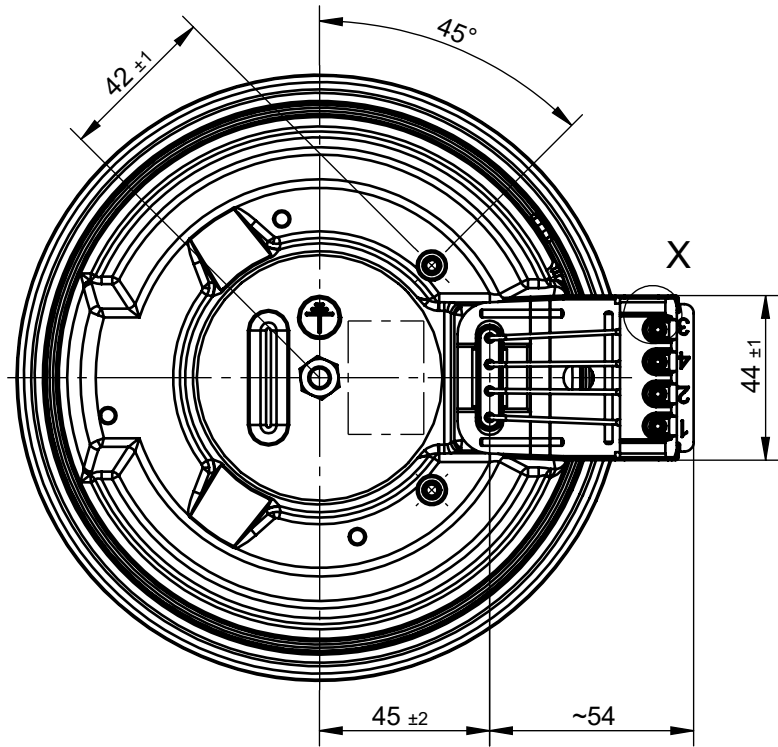


Voltage marking
230 V without
240 V blue
400 V red
other green

General usage and
safety information for
hotplates see
document 90.60027.135

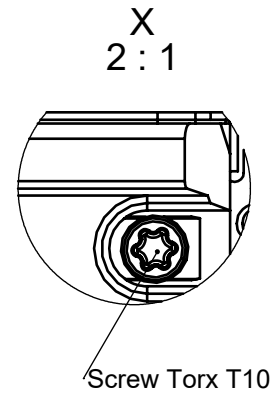

Wiring diagram

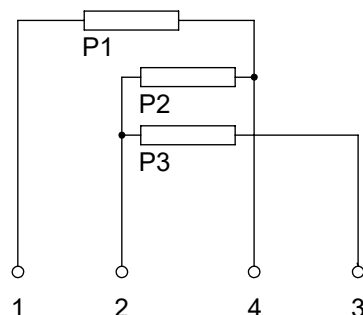

5	19.14453.525	1000	230	280	175	545	1000	720	550	175	140	90	X	X		44±2
4	19.14453.515	1000	230	280	175	545	1000	720	550	175	140	90	X	X		47±3
3	19.14453.210	1000	115	280	175	545	1000	720	550	175	140	90		X		53±3
2	19.14453.002	1000	230	280	175	545	1000	720	550	175	140	90	X	X		53±3
1	19.14453.001	1000	400	400	200	400	1000	600	400	200	140	100	X	X		53±3

Pos	Type	Power	Voltage	Rated power			Switch positions						ECO ③	Appro.	"A" in mm
			This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.			Blank No. EN Mat.No.						Scale Unit			
						Material						mm			
						Surface Texture ISO 21920-1						Scale			
						General Tolerances ISO 2768-cK						1:2			
3	A01851	2017-05-30				Designation EGO Hotplate 145									
2	A01778	2016-10-03	CAD	Date	Name										
1	A01764	2016-08-03	Creat.	2023-11-28	STERNENM										
Cha.	Information No.	Date	Proc.	2023-11-28	STERNENM										
F.Rel.	A01745	2016-07-21	Rel.	2023-12-14	MDERLINK										
			item-no. see table on drawing			document id. C000004870 page 1 of 1			Sheet 010	Ver. 04	Rev. A	Stat. F	Sheets	Doc.	Ex.Doc.
Origin			Repl.for			Repl.by				Ref.					